
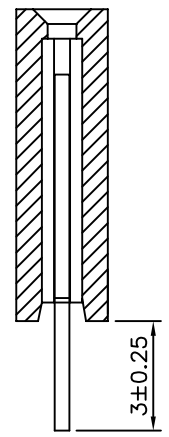
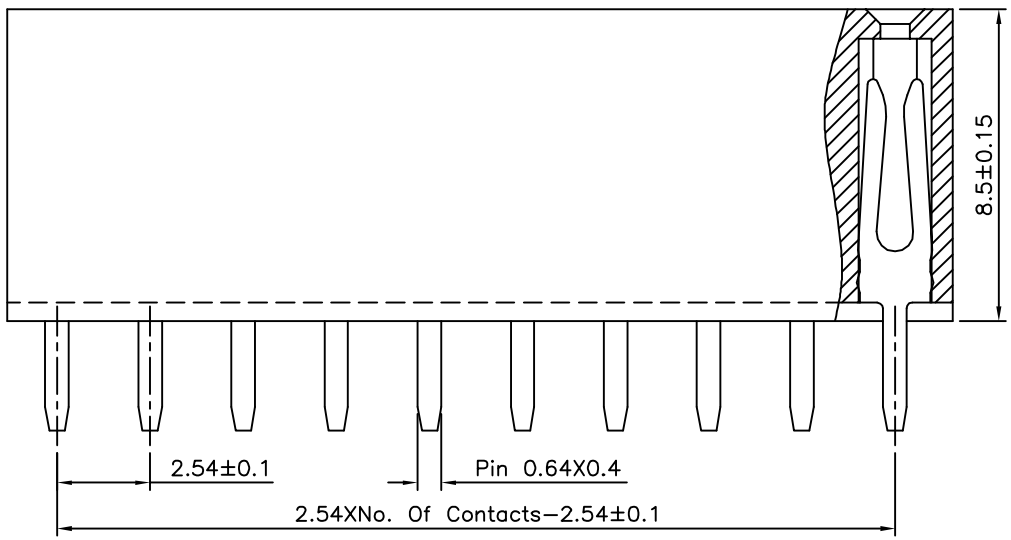
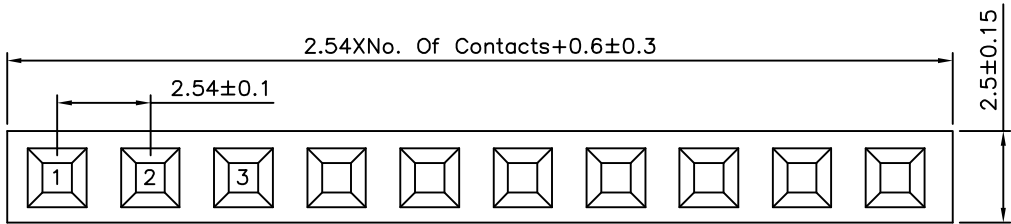


SPECIFICATION
 Current Rating:3 Amps
 Withstand Voltage:500V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Insulator:PA6T(UL94V-0),Black
 RoHS Compliant

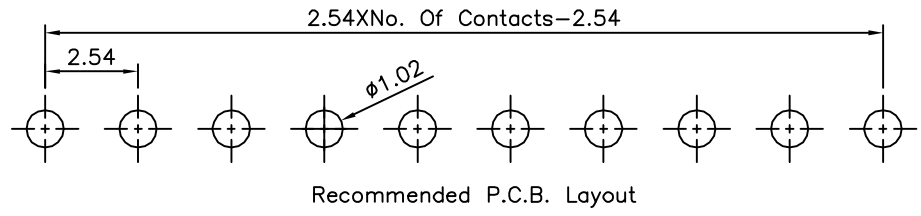

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED	
00534		EMILY		TOLERANCES ARE	
		CHECKED BY		X. ± 0.25 X.* $\pm 2^{\circ}$	
		HZF		.X ± 0.20 .X* $\pm 1.5^{\circ}$	
		DRAWING BY		.XX ± 0.15 .XX* $\pm 1^{\circ}$	
		SONG		.XXX ± 0.10 .XXX* $\pm 0.5^{\circ}$	
SCALE	NONE	REV.	A0	UNIT	mm

NO.	REV.	REVISIONS	CHK	DATE
△ A0		NEW RELEASE	HZF	04/04/2013